

# Moon2Deep




## Specifikationer

Udformning:	Støbt aluminium og stålfront
Afskærmning:	Mikroprismatisk mat, PS.
Spænding:	220-240V ~ 50-60 Hz
Driver:	CC & CC-DA
Levetid:	100.000 timer fejlrate max. 10%
Flimrer:	≤ 4 %
Montage:	Indbygget
Lysnedgang:	L90/B10>50.000 timer v/Ta 25°C
SDCM:	MacAdam 3
Lysudbytte:	<107lm/Watt
Farve:	RAL9016
Producentgaranti:	5 år
Lysfarve:	3000K, 4000K

Wattage	Dimensioner			Vægt	Lysfarve	Ra-værdi	Lumen
	A1	L1	H				
				kg			
10W	170	200	110	1,3	3000K	>80	950 lm
14W	170	200	110	1,3	3000K	>80	1400 lm
18W	170	200	110	1,3	3000K	>80	1800 lm
10W	170	200	110	1,3	4000K	>80	1000 lm
14W	170	200	110	1,3	4000K	>80	1500 lm
18W	170	200	110	1,3	4000K	>80	1900 lm

## Yderligere informationer

Lumenpakker kan korrigeres, for tilpasning af projekter.

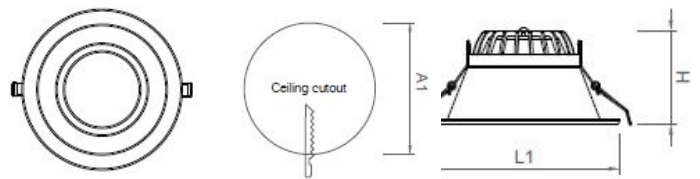

## Tekniske mål og tegninger

## Overensstemmelser



## Photometrisk data

