

MLC28C-P, MLC21C-P, MLC16C-P and MLC10C-P
 ON-OFF / 3-step dimming function
 Standard version



Introduction

- Integration of microwave motion sensor, daylight sensor and LED power supply.
- Automatic switching and dimming based on motion and light level.
- Constant current can be set via DIP switch.
- Compact size makes the drivers suitable to fix within most LED ceiling lights.
- Detection area, time delay and daylight threshold can be precisely set via DIP switch.

Sensor DIM LED drivers, originally pioneered by Merrytek, are innovative products integrated with HF motion detector, daylight sensor and LED power supply.

The products supply a simple energy-saving solution for LED ceiling lights. As all control parts are integrated in a same housing, it is very easy to assemble and save labor cost.

Compact size makes the drivers easy to be installed in luminaires and get more simple lighting structure.




Max.8M



Light Sensor



Hold Time
 10s~30min



Mounting Height
 6m Max.



Automatic
 On/off



Automatic
 Dimming


Optional Function

ON-OFF Function


The products provide ON-OFF and steps dimming function for LED lighting, users can select the right function according to different applications.



With sufficient ambient light, the sensor does not switch on the lamp.

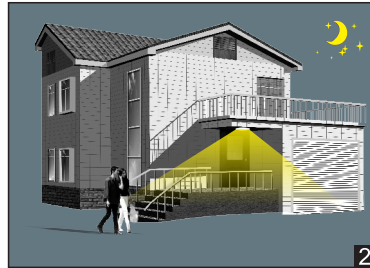


With insufficient ambient light, the sensor switches on the lamp when motion is detected.

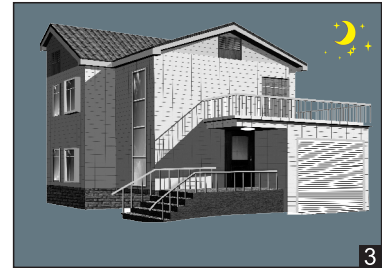


After hold time, the lamp gradually dims down if no motion detected.


3-step dimming function



With sufficient ambient light, the sensor does not switch on the lamp.



With insufficient ambient light, the sensor switches on the lamp when motion is detected.




After hold time, the sensor dims the lamp at a low light level if no new motion trigger.




After stand-by period, the sensor switches off the lamp if no motion is detected in its detection zone.


Wiring scheme

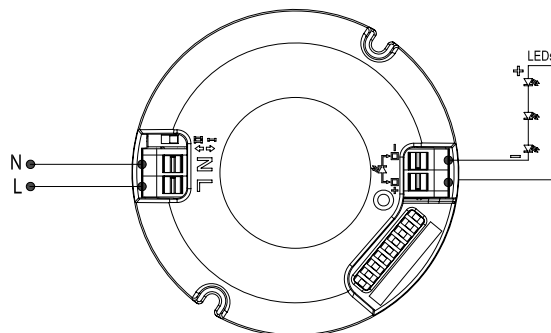

Detection Pattern

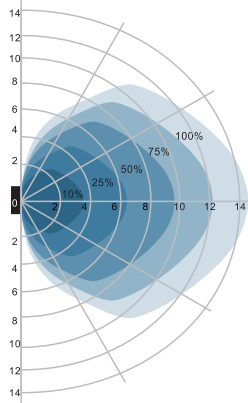


Wall mounting pattern (Unit: m)
Suggested installation height: 1-1.8m

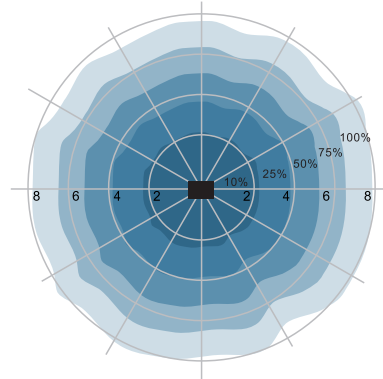

Ceiling mounting pattern (Unit: m)
Suggested installation height: 2.5-6m


Technical Parameters

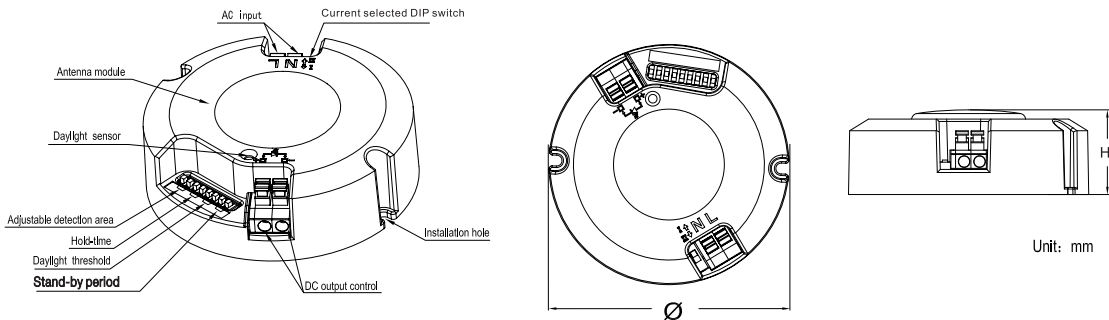

Model NO.	MLC28C-P	MLC21C-P	MLC16C-P	MLC10C-P
Operating voltage	220~240Vac, 50/60Hz	220~240Vac, 50/60Hz	220~240Vac, 50/60Hz	220~240Vac, 50/60Hz
Output constant current	450/550/600/700mA, set via DIP switch	300mA/ 350mA, set via DIP switch	300mA/ 350mA, set via DIP switch	300mA/ 350mA, set via DIP switch
Output voltage	22-40Vdc	34-60Vdc	28-48Vdc	14-28Vdc
Efficiency	≥80%	≥80%	≥80%	≥80%
Power factor	≥0.9	≥0.9	≥0.9	≥0.9
HF system	5.8GHz±75MHz, ISM wave band	5.8GHz±75MHz, ISM wave band	5.8GHz±75MHz, ISM wave band	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW	<0.5mW	<0.5mW	<0.5mW
Power consumption	≤1W(standby)	≤1W(standby)	≤1W(standby)	≤1W(standby)
Detection zone Max.(D x H)	16m x 6m	16m x 6m	16m x 6m	16m x 6m
Detection sensitivity	10% / 50% / 75% / 100%	10% / 50% / 75% / 100%	10% / 50% / 75% / 100%	10% / 50% / 75% / 100%
Hold time	5s / 90s / 3min / 10min	5s / 90s / 3min / 10min	5s / 90s / 3min / 10min	5s / 90s / 3min / 10min
Corridor function	0s / 30s / 10min / Disable	0s / 30s / 10min / Disable	0s / 30s / 10min / Disable	0s / 30s / 10min / Disable
Daylight sensor	5lux / 15lux / 50Lux / Disable	5lux / 15lux / 50Lux / Disable	5lux / 15lux / 50Lux / Disable	5lux / 15lux / 50Lux / Disable
Stand-by dimming level	10%, can be customized	10%, can be customized	10%, can be customized	10%, can be customized
Mounting height	6m Max.	6m Max.	6m Max.	6m Max.
Motion detection	0.5~3m/s	0.5~3m/s	0.5~3m/s	0.5~3m/s
Detection angle	150° (Wall installation) 360° (Ceiling installation)	150° (Wall installation) 360° (Ceiling installation)	150° (Wall installation) 360° (Ceiling installation)	150° (Wall installation) 360° (Ceiling installation)
Working temperature(Ta)	-20c ~45c	-20c ~45c	-20c ~45c	-20c ~45c
Size (ΦxH)	82x28.5mm	78x28.5mm	78x28.5mm	68x28.5mm
IP rating	IP20	IP20	IP20	IP20


Setting

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

ON ↑ 		1	2	
	I	ON	ON	100%
	II	-	ON	75%
	III	ON	-	50%
	IV	-	-	10%


Detection area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

ON ↑ 		3	4	
	I	ON	ON	5s
	II	-	ON	90s
	III	ON	-	3min
	IV	-	-	10min

Hold time


Refers to the time period the lamp remains at 100% illumination after no motion detected.

ON ↑ 		5	6	
	I	ON	ON	Disable
	II	-	ON	50Lux
	III	ON	-	15Lux
	IV	-	-	5Lux

Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.
50lux: twilight operation, 15lux, 5lux: darkness operation only.

ON ↑ 		7	8	
	I	ON	ON	0s
	II	-	ON	30s
	III	ON	-	10min
	IV	-	-	+∞

Corridor function (Stand-by period)

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people.

When set to “+∞”, the low light is maintained until motion is detected.
When set to “0s”, the light will turn off after hold time.

NOTE: Daylight sensor is active only when light totally switch off. That means, if set stand-by period on ‘Disable’ mode, the daylight sensor function will be not available.