


Lumen[®] Light

Bolero midi/maxi





EN60598/CEM2001/108/CE

Power: 230V-50Hz
 IK08-IP20/IP44
 Temp: -20° C/+50° C
 Socked: LED-Platta
 Ligth source: LED 11W/20W
 PC Diffuser/Steel house



Note: Kelvin change switch is placed inside the luminaire, on the back of LED plate.
 Disconnect the power before operation.
 Settings are 3000K/3500K/4000K, factory setting is 3000K.

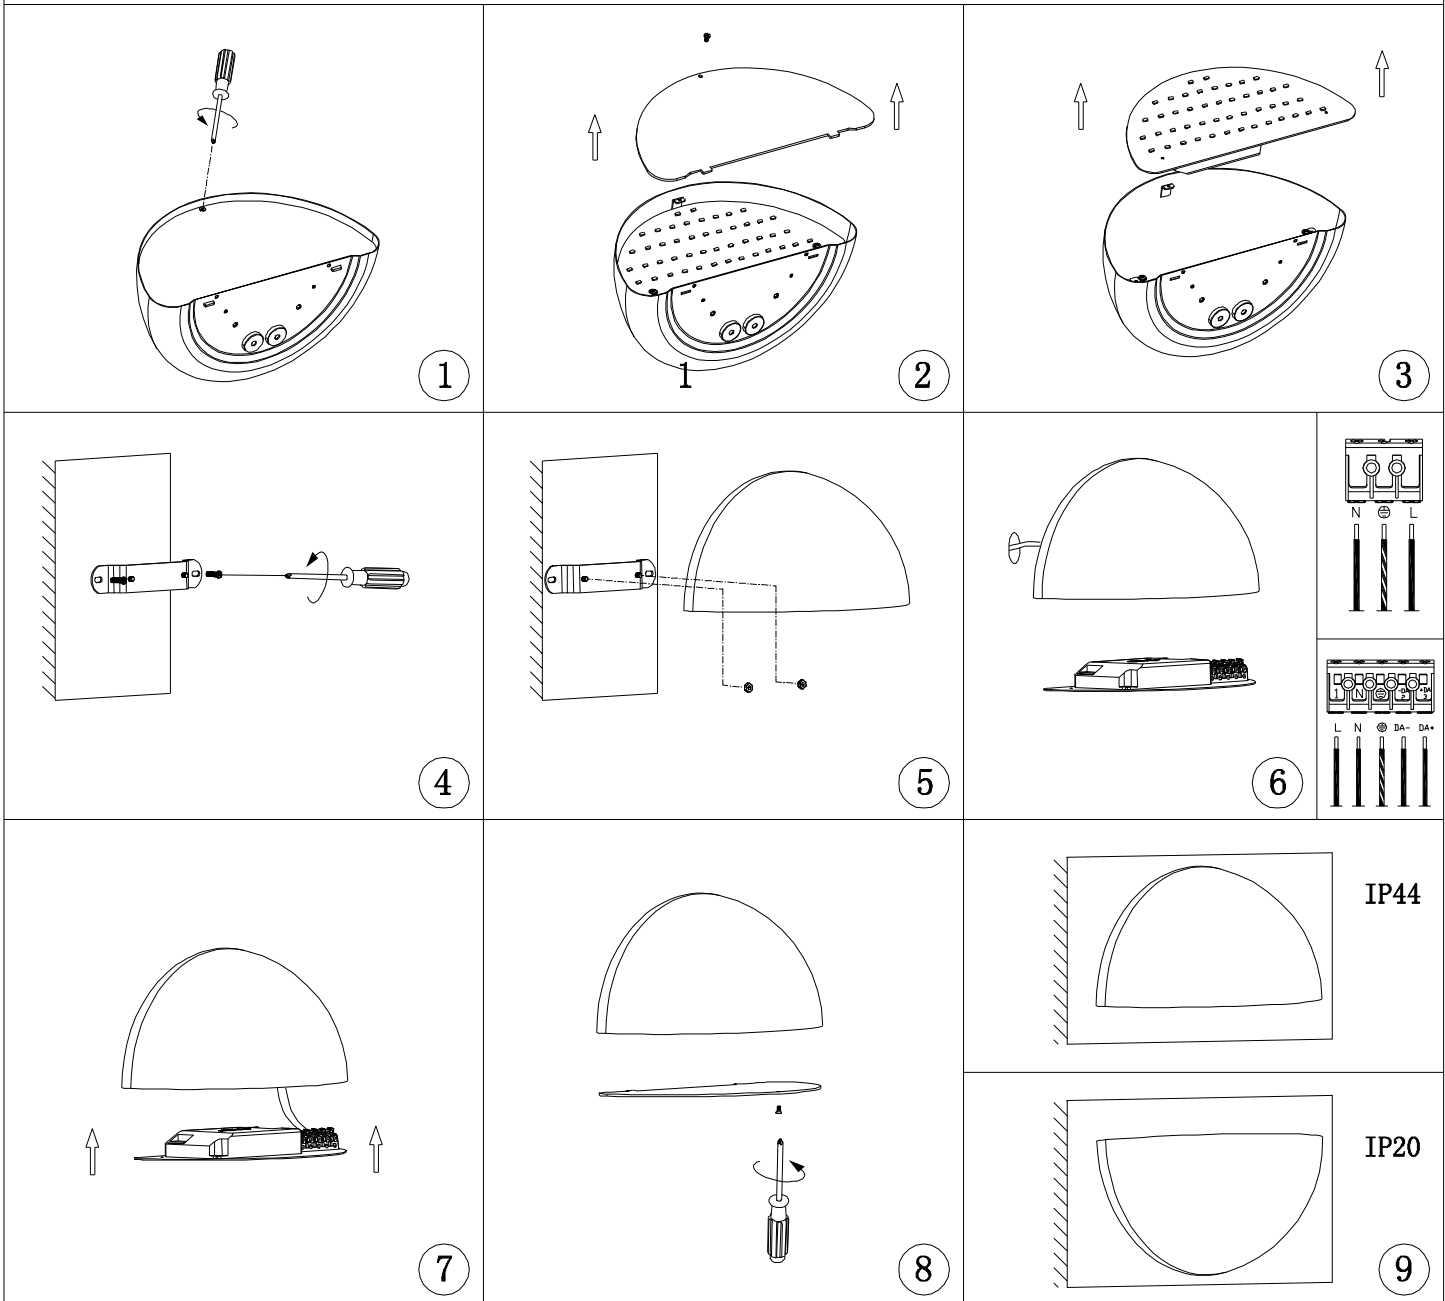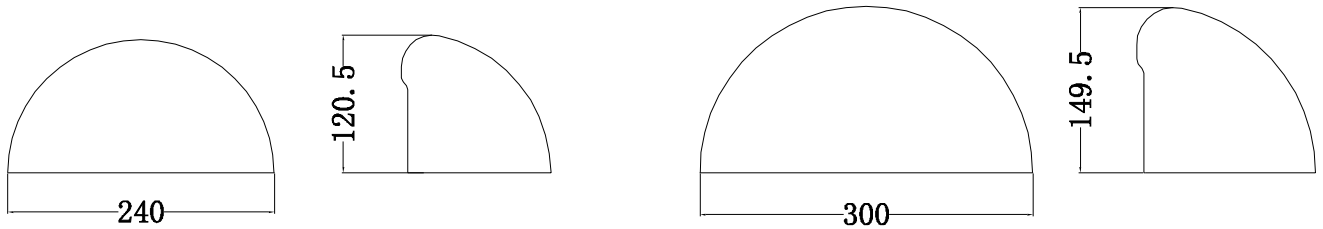

Lumen[®] Light

Bolero midi/maxi



EN60598/CEM2001/108/CE

Power: 230V-50Hz
 IK08-IP20/IP44
 Temp: -20° C/+50° C
 Socked: LED-Platta
 Ligth source: LED 11W/20W
 PC Diffuser/Steel house

Bolero midi/maxi current setting			
PIN 1	PIN 2	PIN 3	I out (mA)
●	●	●	500
○	●	●	450
●	○	●	400
○	○	●	350
●	●	○	300
○	●	○	250
●	○	○	200
○	○	○	150

CCT	Current Setting	Bolero Midi		Bolero Maxi	
		Power (W)	Lumen (lm)	Power (W)	Lumen (lm)
3000K	150mA	5.5	493	7.6	753
	200mA	6.9	636	9.8	983
	250mA	8.5	779	12.4	1234
	300mA	10.2	917	14.5	1434
	350mA	11.6	1040	17.3	1671
	400mA	13.1	1157	19.5	1867
	450mA	14.9	1286	22.3	2078
	500mA	16.3	1379	24.7	2246

CCT	Current Setting	Bolero Midi		Bolero Maxi	
		Power (W)	Lumen (lm)	Power (W)	Lumen (lm)
3500K	150mA	5.4	521	7.3	812
	200mA	6.9	680	9.5	1082
	250mA	8.4	839	11.9	1373
	300mA	9.9	991	14.1	1613
	350mA	11.3	1140	16.6	1890
	400mA	12.8	1278	18.7	2113
	450mA	14.3	1419	21.3	2374
	500mA	15.8	1555	23.5	2585

CCT	Current Setting	Bolero Midi		Bolero Maxi	
		Power (W)	Lumen (lm)	Power (W)	Lumen (lm)
4000K	150mA	5.4	527	7.6	853
	200mA	7	691	9.7	1107
	250mA	8.5	846	12.2	1389
	300mA	10	987	14.3	1611
	350mA	11.6	1126	17	1876
	400mA	13.1	1255	19.2	2083
	450mA	14.8	1387	22	2317
	500mA	16.4	1498	24.2	2504