




# BRIGHT MOON

- PLB-045-30/40
- PLB-060-40/60
- PLB-075-50/70
- PLB-090-70/90
- PLB-120-90/120

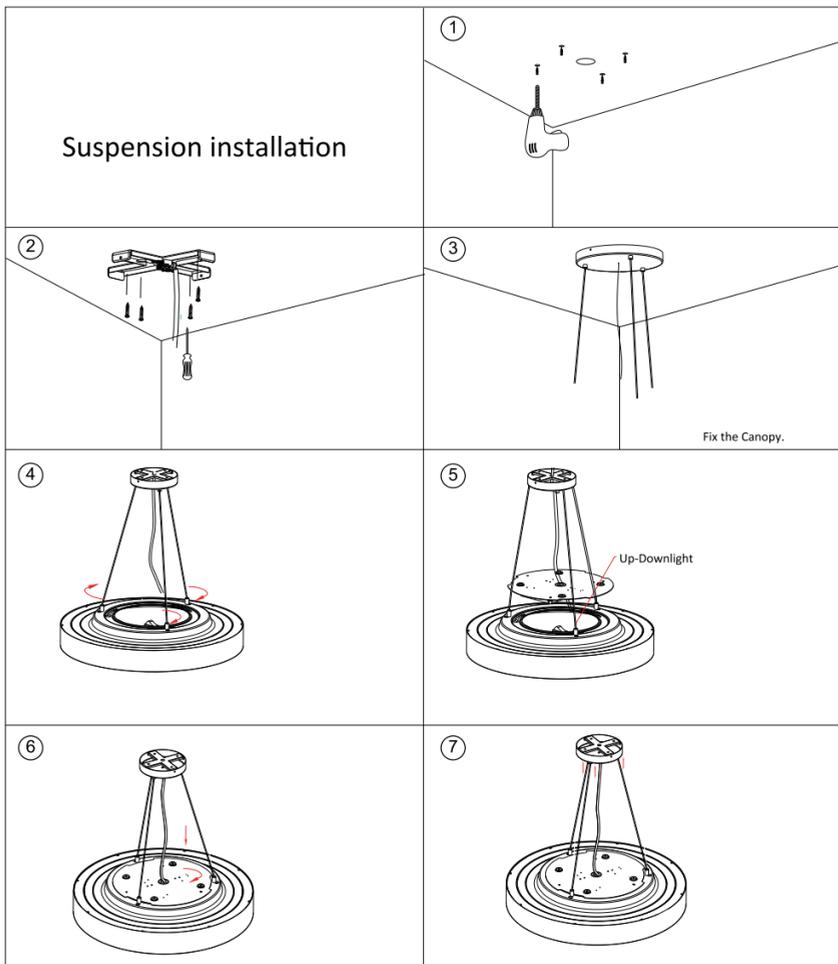

Model No.	PLB-045-30/40	PLB-060-40/60	PLB-075-50/70	PLB-090-70/90	PLB-120-90/120
Color Temperature	2700-6500K(Optional)	2700-6500K(Optional)	2700-6500K(Optional)	2700-6500K(Optional)	2700-6500K(Optional)
Beam Angel	90°	90°	90°	90°	90°
Demension	φ450X115mm	φ600X115mm	φ750X115mm	φ900X115mm	φ1200X115mm
Input Voltage	200-240Vac	200-240Vac	200-240Vac	200-240Vac	200-240Vac
Working Temperature	-20~45°C	-20~45°C	-20~45°C	-20~45°C	-20~45°C
Power Consumption	30/40W	40/60W	50/70W	70/90W	90/120W
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
Ip Protection Class	IP20	IP20	IP20	IP20	IP20
Colr Randerng Index	80/90Ra	80/90Ra	80/90Ra	80/90Ra	80/90Ra

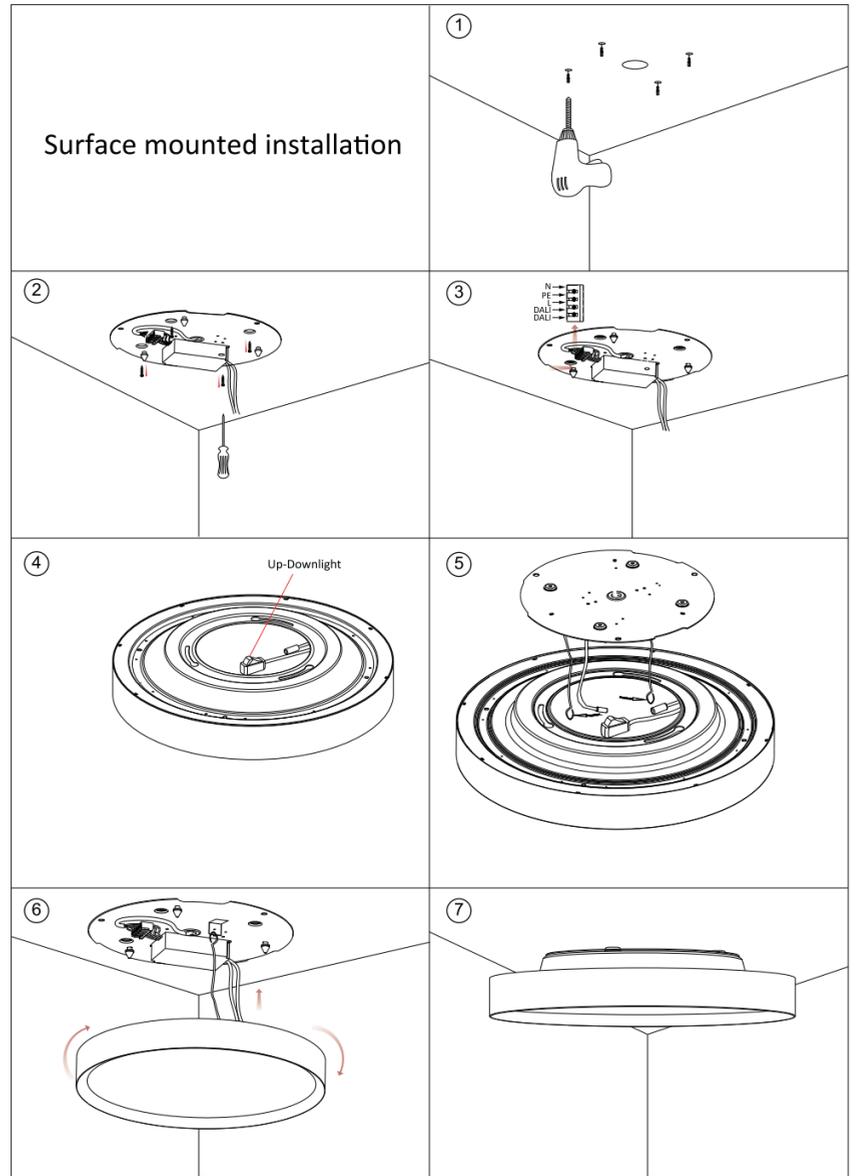

#### Warning!

During the installation maker sure power is off.  
 Pictures must be installed by a qualified electrician in accordance with all national and local electrical, and construction codes, and regulations.  
 Avoid looking directly to the LEDs light source to prevent dazzling or another annoyances.  
 Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.  
 Do not use chemicals or abrasives to clean this product. Use soft mat only. Avoid scratch the surface.

