


XTS 6
XTSF 6

XTSC 6
XTSCF 6

Quality in Focus 



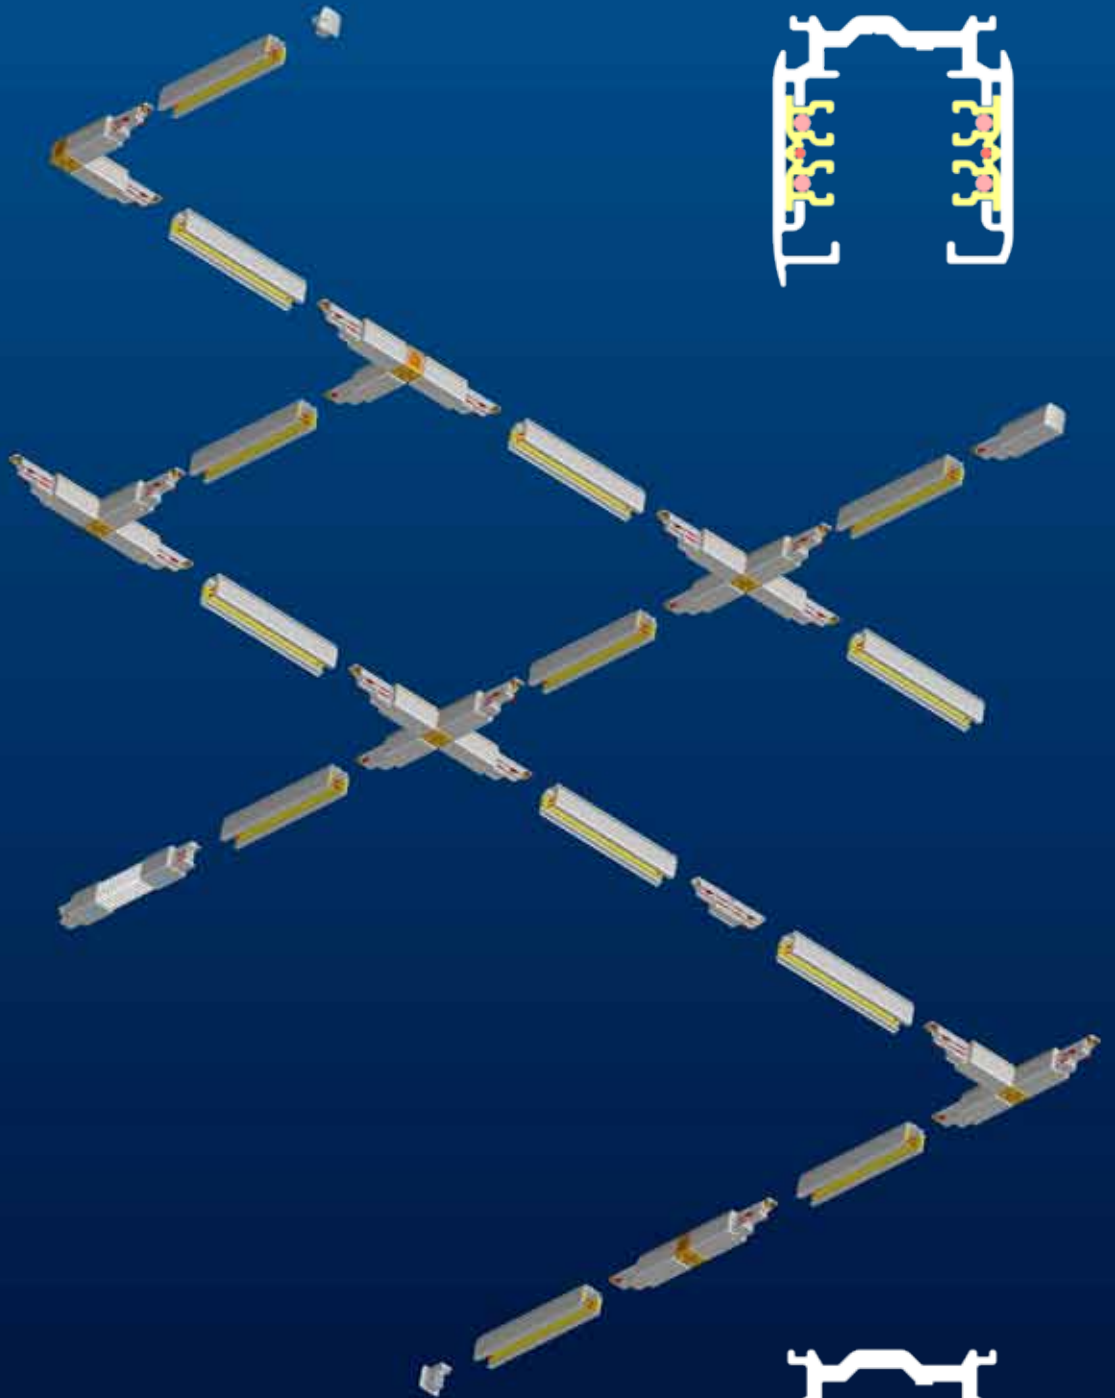

XTS 6100 (L=1000)
XTS 6200 (L=2000)
XTS 6300 (L=3000)
XTS 6400 (L=4000)

XTS 6 surface installation



XTSF 6100 (L=1000)
XTSF 6200 (L=2000)
XTSF 6300 (L=3000)
XTSF 6400 (L=4000)

XTSF 6 recessed installation




XTSC 6100 (L=1000)
XTSC 6200 (L=2000)
XTSC 6300 (L=3000)
XTSC 6400 (L=4000)

XTSC 6 surface installation



XTSCF 6100 (L=1000)
XTSCF 6200 (L=2000)
XTSCF 6300 (L=3000)
XTSCF 6400 (L=4000)

XTSCF 6 recessed installation

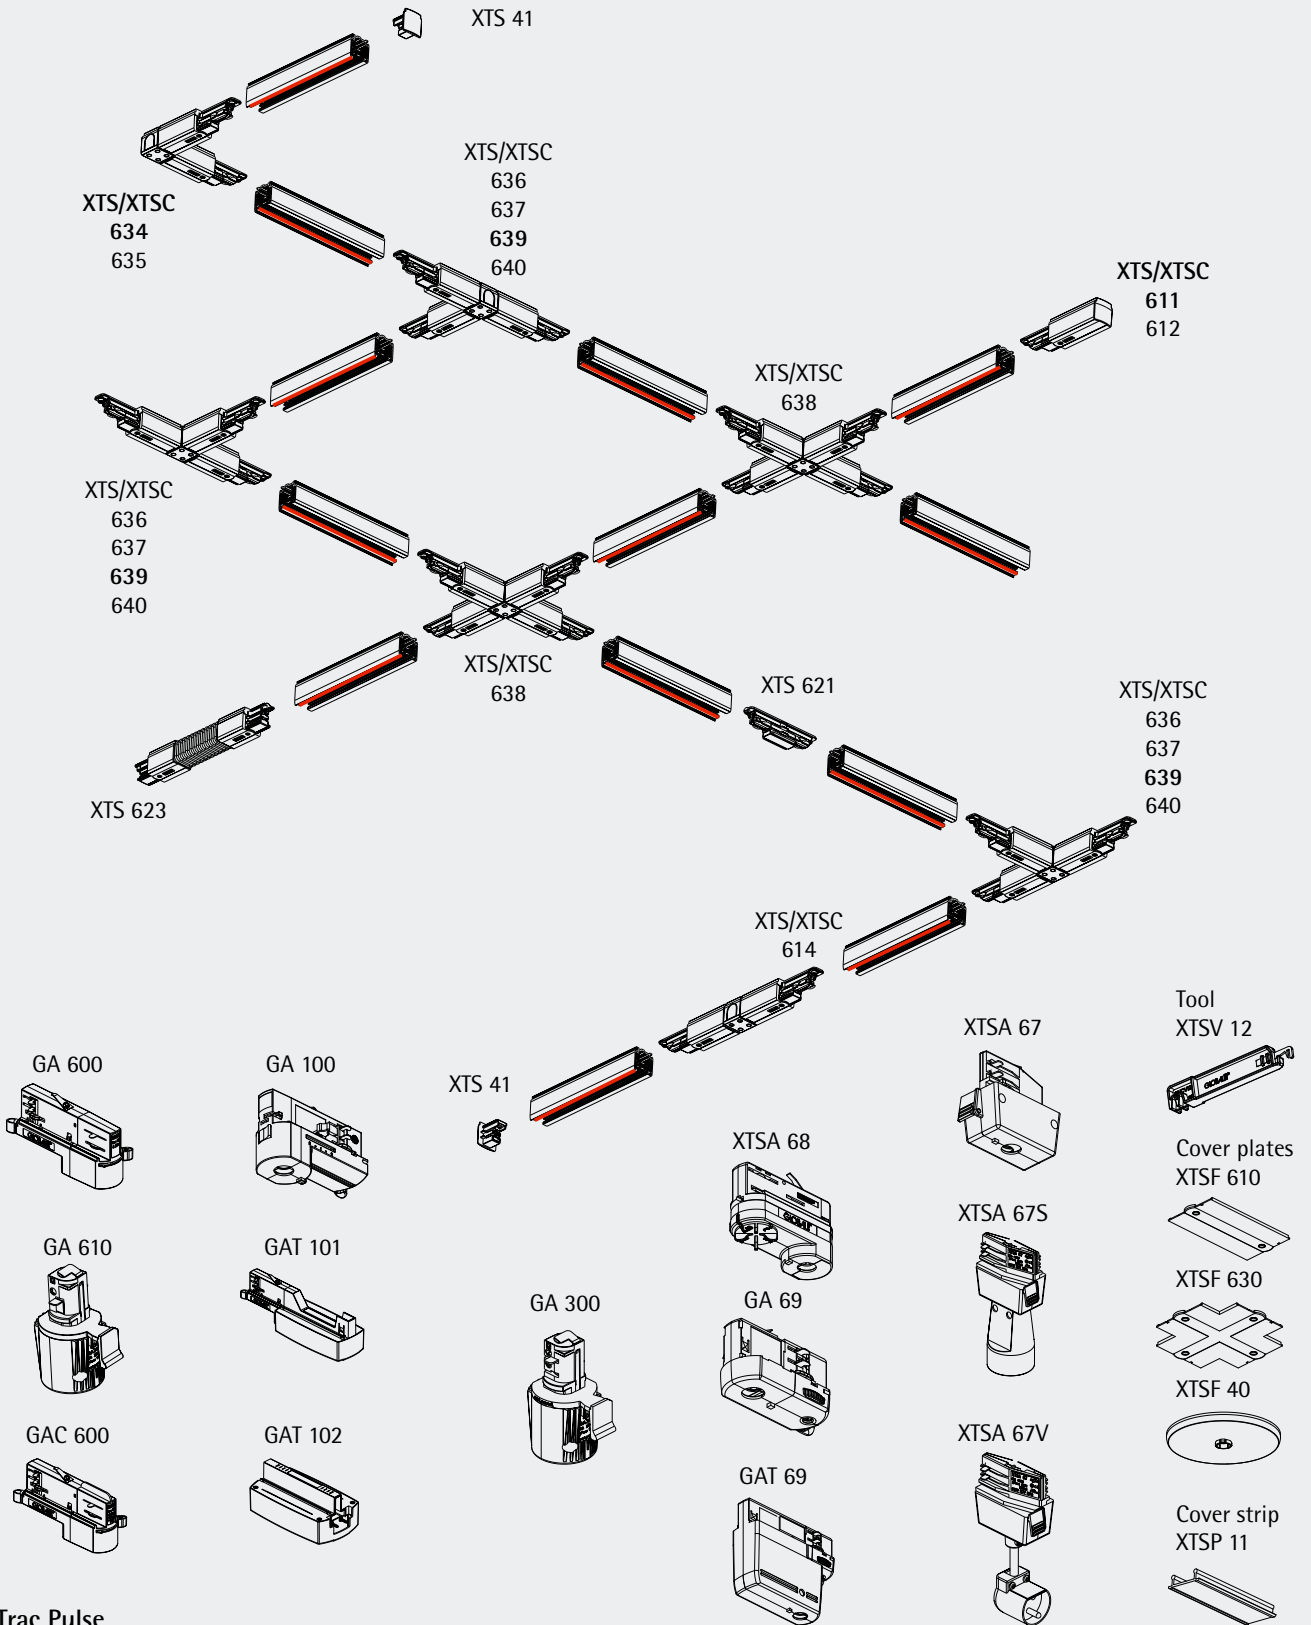

GLOBAL Trac Pulse tracks

XTS6 series:

L1/L2/L3/neutral/ground 16A/400V, IP20 + L10/N10 10A/250V

XTSC6 series:

L1/L2/L3/neutral/ground 16A/400V, IP20 + DA/DA 2x1A/50V FELV AC (DALI)



Tracks


| Type | Type | Length |
|------------|-------------|--------|
| XTS 6100-1 | XTSC 6100-1 | 1000 |
| XTS 6200-1 | XTSC 6200-1 | 2000 |
| XTS 6300-1 | XTSC 6300-1 | 3000 |
| XTS 6400-1 | XTSC 6400-1 | 4000 |
| XTS 6100-2 | XTSC 6100-2 | 1000 |
| XTS 6200-2 | XTSC 6200-2 | 2000 |
| XTS 6300-2 | XTSC 6300-2 | 3000 |
| XTS 6400-2 | XTSC 6400-2 | 4000 |
| XTS 6100-3 | XTSC 6100-3 | 1000 |
| XTS 6200-3 | XTSC 6200-3 | 2000 |
| XTS 6300-3 | XTSC 6300-3 | 3000 |
| XTS 6400-3 | XTSC 6400-3 | 4000 |




Recessed tracks

| | | |
|-------------|--------------|------|
| XTSF 6100-1 | XTSCF 6100-1 | 1000 |
| XTSF 6200-1 | XTSCF 6200-1 | 2000 |
| XTSF 6300-1 | XTSCF 6300-1 | 3000 |
| XTSF 6400-1 | XTSCF 6400-1 | 4000 |
| XTSF 6100-2 | XTSCF 6100-2 | 1000 |
| XTSF 6200-2 | XTSCF 6200-2 | 2000 |
| XTSF 6300-2 | XTSCF 6300-2 | 3000 |
| XTSF 6400-2 | XTSCF 6400-2 | 4000 |
| XTSF 6100-3 | XTSCF 6100-3 | 1000 |
| XTSF 6200-3 | XTSCF 6200-3 | 2000 |
| XTSF 6300-3 | XTSCF 6300-3 | 3000 |
| XTSF 6400-3 | XTSCF 6400-3 | 4000 |

Use of L- and T-accessories

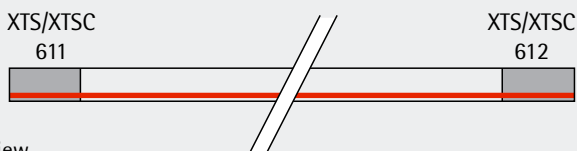

Floor view

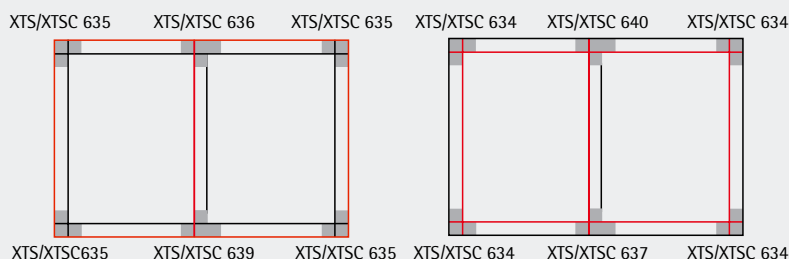

Red line indicates polarity ridge


Global Trac accessories

| Name | XTS6 Type | XTSC6 Type |
|---------------------------|-----------|------------|
| End feed | XTS 611-1 | XTSC 611-1 |
| | XTS 611-2 | XTSC 611-2 |
| | XTS 611-3 | XTSC 611-3 |
| End feed, mirror image | XTS 612-1 | XTSC 612-1 |
| | XTS 612-2 | XTSC 612-2 |
| | XTS 612-3 | XTSC 612-3 |
| Middle feed | XTS 614-1 | XTSC 614-1 |
| | XTS 614-2 | XTSC 614-2 |
| | XTS 614-3 | XTSC 614-3 |
| Straight connector | XTS 621-1 | XTS 621-1 |
| | XTS 621-2 | XTS 621-2 |
| | XTS 621-3 | XTS 621-3 |
| Flexible corner connector | XTS 623-1 | XTS 623-1 |
| | XTS 623-2 | XTS 623-2 |
| | XTS 623-3 | XTS 623-3 |
| L-feed | XTS 634-1 | XTSC 634-1 |
| | XTS 634-2 | XTSC 634-2 |
| | XTS 634-3 | XTSC 634-3 |
| L-feed | XTS 635-1 | XTSC 635-1 |
| | XTS 635-2 | XTSC 635-2 |
| | XTS 635-3 | XTSC 635-3 |
| T-feed | XTS 636-1 | XTSC 636-1 |
| | XTS 636-2 | XTSC 636-2 |
| | XTS 636-3 | XTSC 636-3 |
| T-feed | XTS 637-1 | XTSC 637-1 |
| | XTS 637-2 | XTSC 637-2 |
| | XTS 637-3 | XTSC 637-3 |
| T-feed | XTS 639-1 | XTSC 639-1 |
| | XTS 639-2 | XTSC 639-2 |
| | XTS 639-3 | XTSC 639-3 |
| T-feed | XTS 640-1 | XTSC 640-1 |
| | XTS 640-2 | XTSC 640-2 |
| | XTS 640-3 | XTSC 640-3 |
| X-feed | XTS 638-1 | XTSC 638-1 |
| | XTS 638-2 | XTSC 638-2 |
| | XTS 638-3 | XTSC 638-3 |
| End cap | XTS 41-1 | XTS 41-1 |
| | XTS 41-2 | XTS 41-2 |
| | XTS 41-3 | XTS 41-3 |

Power supply option in all connectors except XTS 621 and XTS 623.

Available colours:

- 1 Grey RAL 7040
- 2 Black RAL 9005
- 3 White RAL 9010

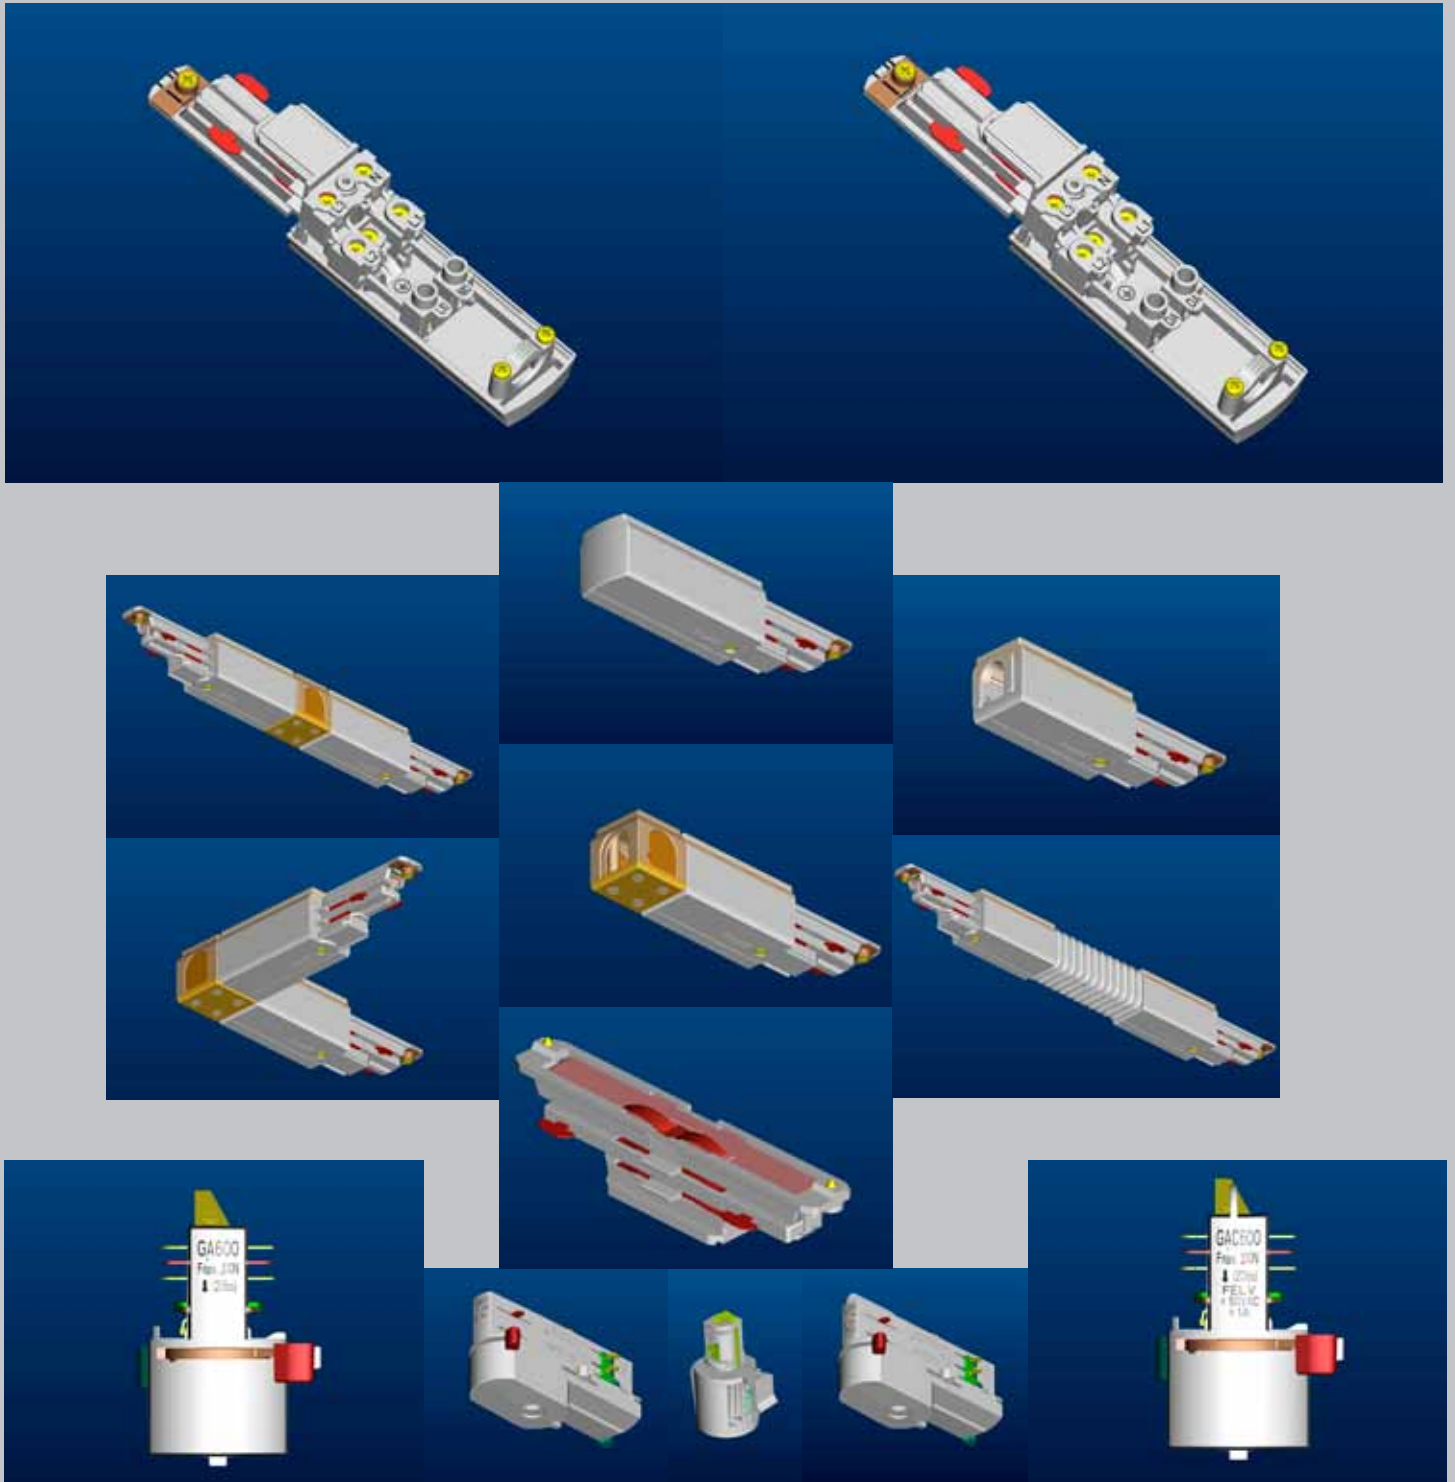

GLOBAL ^{trad} is a registered trademark of Nordic Aluminium Plc.
 MULTI Adapter™ and FIX Point™ are trademarks of Nordic Aluminium Plc.



The quality management system that Nordic Aluminium Plc use is approved by Bureau Veritas Certification and conforms with the ISO 9001:2008 standard.



The environment management system that Nordic Aluminium Plc use is approved by Bureau Veritas Certification and conforms with the ISO 14001:2004 standard.

NORDIC ALUMINIUM

Nordic Aluminium Plc
 P.O. Box 117, FI-02401 Kirkkonummi, Finland
 Visiting address: Kaapelitie 68, FI-02490 Pikkala, Finland
 Tel. +358 20 7660 200, fax +358 20 7660 485, www.nordicaluminium.fi