DC Light ApS Handverkerbyen 10 DK-2670 Greve Denmark



Nova LED



EN60598/CEM2001/108/CE

Power:230V-50Hz IP44 IK08


Temp:-20° C/+50° C Socket: LED-Plate Light source:LED 7W/11W/15W/16W/20W PMMA Diffuser/Alu house



Note: Kelvin change switch is placed inside the luminaire, on the LED plate.

Disconnect the power before operation.

Settings are 3000K/3500K/4000K, factory setting is 3000K.

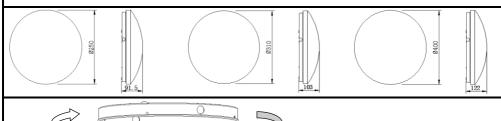



Diffuser Mounted with a twist

