





DC-Light ApS
Handverkerbyen 10
DK-2670 Greve
Danmark

Rillo LED
CE
RoHS Compliant
EN60598/CEM2001/108/CE


Anslutn: 230V-50Hz
850° C- IK10-IP65
Temp: -20° C/+50° C
Sockel: LED-Platta
Ljuskälla: LED 16W/19W
PC hus / PC diffuser



Note: Kelvin change switch is placed inside the luminaire, on the LED plate.
Disconnect the power before operation.
Settings are 3000K/3500K/4000K, factory setting is 3000K.

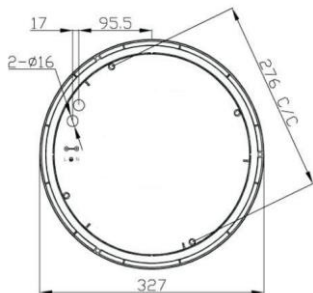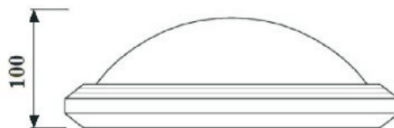

Ring monteras
med skruv-mejsel

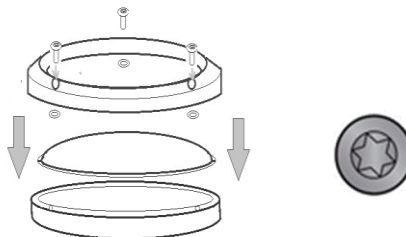

Montringshål 3 st med cc 276mm enligt ovan för PC-hus
Vid utanpåliggande kabel montage använd
medföljande distans ringar.



Använd bifogade packning
och bricka för att uprätthålla
IP klass

2st ø16 införingshål
med tätningar

