


DC Light ApS
 Handverkerbyen 10
 DK-2670 Greve
 Denmark

Rondo LED Recessed



EN60598/CEM2001/108/CE









Power: 230V~50Hz
 IK08-IP44
 Temp: -20° c/50° c
 Socket: LED-Platta
 Lightsource: LED 20W/30W/40W
 PMMA Diffuser/ALU House



Note: Kelvin change switch is placed inside the luminaire, on the LED plate.

Disconnect the power before operation.

Settings are 3000K/3500K/4000K, factory setting is 3000K.

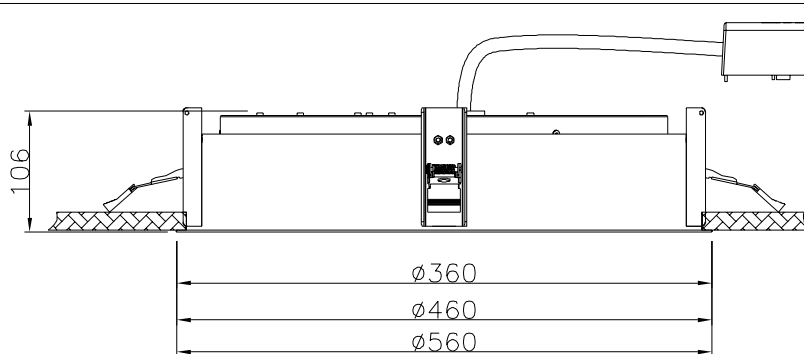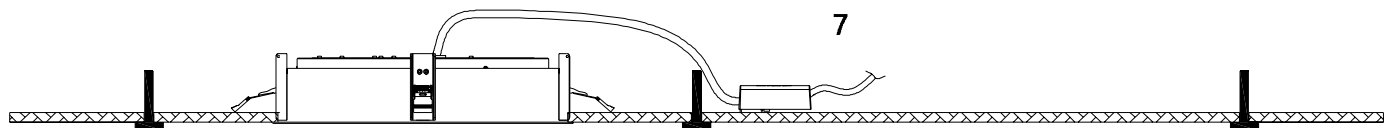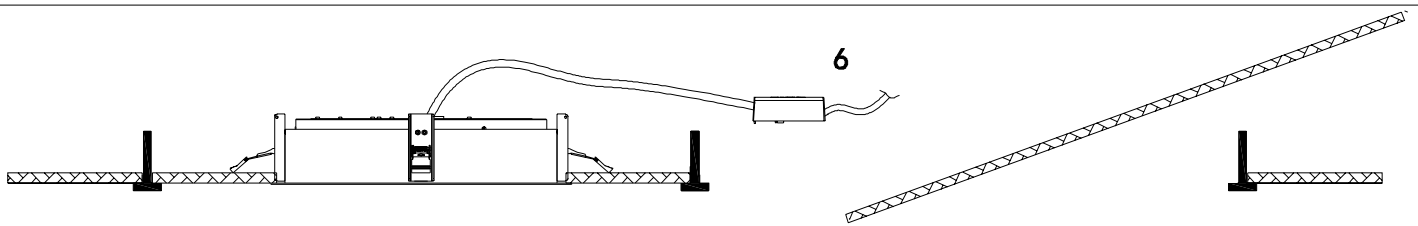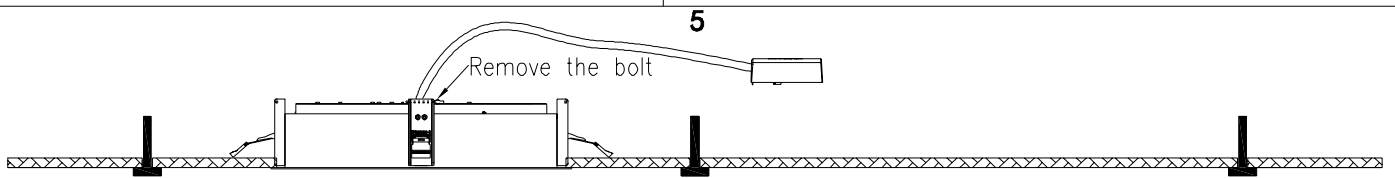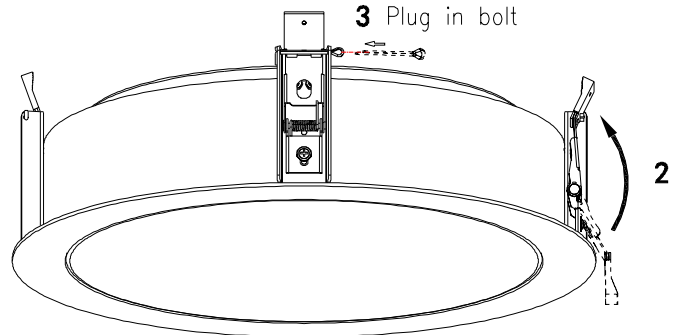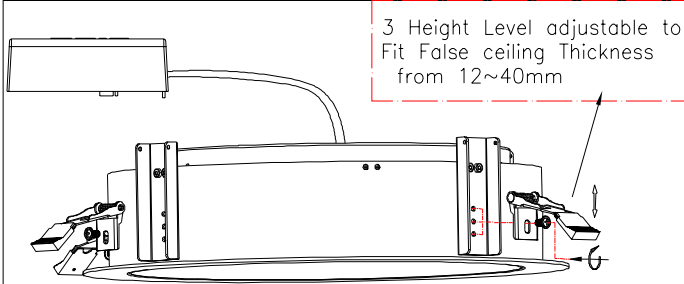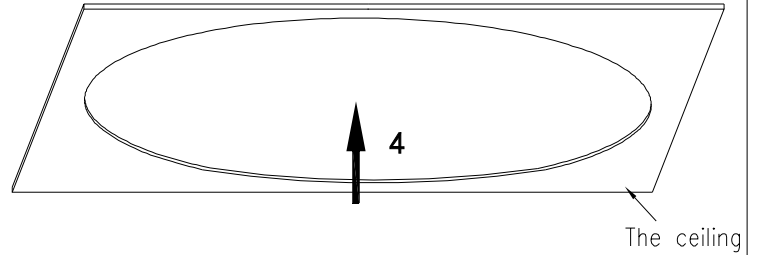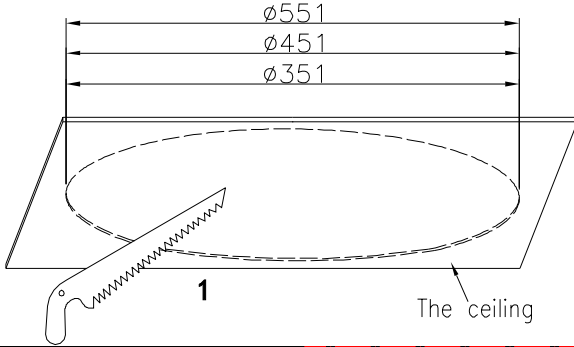

- | | |
|-------------------------|-----------|
| | Bolt |
| | 4x40 3pcs |
| Rondo D325 LED Recessed | |
| | Bolt |
| | 4x40 4pcs |
| Rondo D425 LED Recessed | |
| | Bolt |
| | 4x40 6pcs |
| Rondo D525 LED Recessed | |