



Wall-Mounted Performer

- Robust, waterproof IP65 luminaire with high impact protection (IK10)
- Well integrated in architecture thanks to its comfortable light distribution
- Designed to be easy to install and maintain with up to 2.5mm² through-wiring possibility
- Suitable for both indoor and outdoor applications



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | With sensor | Weight (kg/pc) |
|--------------|-----------------------------|-------------------|-----------|-------|-----------------|-----------|-------------|----------------|
| 1-10V | | | | | | | | |
| 543011000400 | LEDWall-Mounted-P Rd300-21W | CFL 2x26W | 21 | 2550 | 120 | 3000/4000 | No | 1.32 |

Accessories



821017003000
LEDSmart-BLE2-10V-Converter

Packaging Information

| Item | | | Box | | | |
|--------------|-----------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 543011000400 | LEDWall-Mounted-P Rd300-21W | 94051190 | 325x87x328 | 1.52 | 6941408818412 | 1 |
| 821017001400 | LEDSmart-BLE2-10V-Converter | 94059200 | 90x40x30 | 0.09 | 6941408898445 | 1 |
| 821017003000 | LEDSmart-BLE2-10V-Converter | 94059200 | 90x40x30 | 0.09 | 6931783007624 | 1 |

| Technical Specifications | |
|------------------------------|---------------|
| Lifetime (L70) | 50,000 h |
| Lifetime (L80) | 30,000 h |
| On-/Off-cycles | 100,000 |
| Colour consistency (SDCM) | 4 |
| Dimmability | 1-10V |
| Sensor type | No sensor |
| Sensor technology | No sensor |
| Finishing | White RAL9003 |
| Colour rendering index (CRI) | > 80 |
| Degree of protection (IP) | IP65 |
| Impact strength | IK10 |
| Protection class | II |
| Risk group (EN 62471) | RG0 |
| With control gear | Yes |
| Glow wire test | 850°C |
| Power factor | ≥ 0.9 |

| Electrical Supply | |
|-------------------|--|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V |
| DC input voltage | See catalogue appendix Connection Specifications |

| Mechanical Properties | |
|-----------------------|---------------|
| Housing material | Polycarbonate |
| Optical material | Polycarbonate |

| Ambient Conditions | |
|-------------------------|-----------|
| Operating temperature | -30~+50°C |
| Application temperature | +25°C |
| Storage environment | -30~+60°C |

5 YEARS WARRANTY



ENERGY

OPPLE Lighting
543011000400

A
B
C
D
E
F
G


E

21
kWh/1000h

2019/2015

Dimensional Drawing (mm)

LEDWall-Mounted-P Rd300

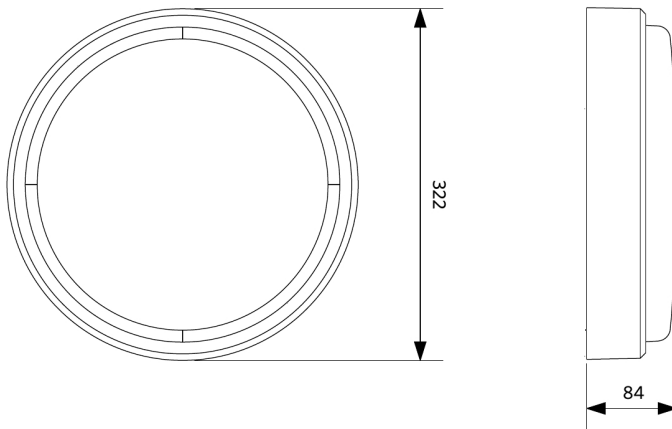

Photometric Data

