


FAN35

Ventilation units with filter

AIR FLOW RATE



520 - 580 m³/h

Performance

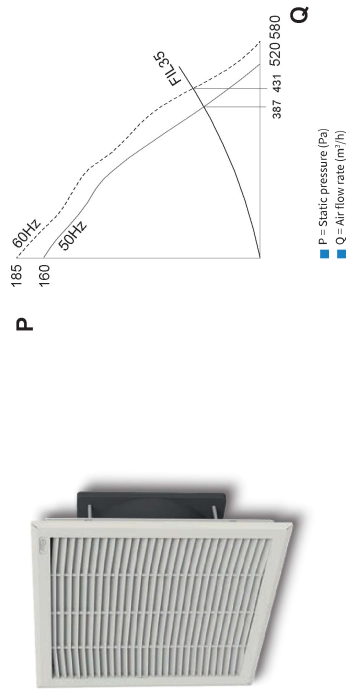


| Features | UoM | FIL35XNOB | FAN35BNOB | FAN35CNOB | FAN35LNOB |
|--------------------------|-------------------|------------|--------------------------|------------------------|------------------------|
| Air flow rate | m ³ /h | - | 520-580 | 520-580 | 520-580 |
| Power supply | V-Hz | - | 230 L-50-60 | 115 L-50-60 | 400 3-50-60 |
| Dimensions HxWxD | mm | 325x325x28 | 325x325x153 | 325x325x153 | 325x325x153 |
| Power draw | W | - | 85-115 | 85-115 | 85-115 |
| Max current | A | - | 0.38-0.50 | 0.70-0.90 | 0.18-0.18 |
| Overcurrent protection | - | - | Internal motor | Internal motor | Internal motor |
| Electrical connection | - | - | Faston | Faston | Terminal board |
| Operating cycle | - | - | 100% | 100% | 100% |
| Temperature limits | °C | -30+75 | -10+50 | -10+50 | -10+50 |
| IP rating EN60529 | - | IP54 | IP54 | IP54 | IP54 |
| Noise level | dB(A) | - | 61-63 | 61-63 | 61-63 |
| FAN + FIL air flow rate | m ³ /h | - | 1x FIL35XNOB: 387-431 | 1x FIL35XNOB: 387-431 | 1x FIL35XNOB: 387-431 |
| Air flow direction | - | - | Ext to int. Reversible | Ext to int. Reversible | Ext to int. Reversible |
| Filter (Eurovent) | - | - | EU4 | EU4 | EU4 |
| Motor support | - | - | - | Bearings | Bearings |
| Lifetime L ₁₀ | h | - | 45000 | 45000 | 45000 |
| Weight | kg | 0.6 | 3.1 | 3.1 | 3.1 |
| Colour | - | - | RAL 7035 embossed effect | | |
| Conformity | - | - | CE | CE | CE |




FAN35



Dimensions



FIL35



Drilling templates

| Accessories | Part Number |
|---|-------------|
| Pack of 10 fabric filters for FAN35 | AAFFN35 |
| Pack of 10 high-efficiency fabric filters for FAN35 | AAFFH35 |
| 0-60°C thermostat, normally open 10A | AAFTO12 |
| 5-60°C thermostat, change-over contact 10A | AAWTS10 |
| Bel lows kit for IP55 ingress protection | C12201052 |

N.B.: The drilling templates are only approximate. For any requirements, contact our technical/sales office.